

EC 56 EASY FIT

Self Contained Ice Machine up to 35 kg

Item #:
Project:
Quantity:



FEATURES

- Produces individual Gourmet crystal clear supercubes.
- Resistant stainless steel exterior. Simple and reliable electromechanic controls.
- Front panel in and out airflow (air cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Easily accessible front ON-OFF switch. Routine maintenance visible alarm light on front panel.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- Water system protected by patented anti-scale system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.



EC L 56
Large Gourmet 39 g
Ø 38 x H 41 mm



EC M 56
Medium Gourmet 20 g
Ø 30 x H 34 mm



EC S 56
Small Gourmet 8 g
Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled
Water cooled

INTERNAL BIN CAPACITY

12 kg

REFRIGERANT GAS

R134a

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

VOLTAGE V/Hz/ph

230(60/1
230/50/1
230/60/1

Certifications:



IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com





Self Contained Ice Machine up to 35 kg

EC 56 EASY FIT

Self Contained Ice Machine up to 35 kg


Item #:
Project:
Quantity:

Self Contained Ice Machine up to 35 kg

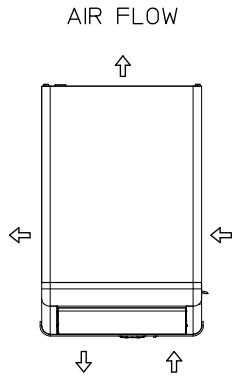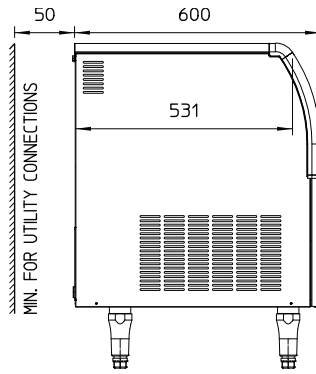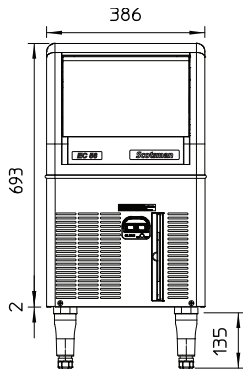

UNIT OF MEASUREMENT: mm

1. 3/4" OD - OVERFLOW DRAIN
2. 3/4" GAS - WATER INLET
3. 3/4" GAS - WATER OUTLET
WATER COOLED UNIT ONLY
4. 3/4" GAS - WATER INLET
WATER COOLED UNIT ONLY
5. CORD SET

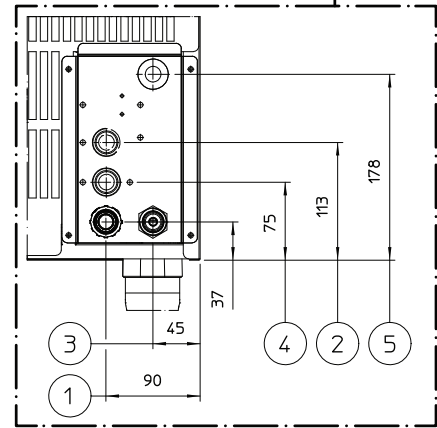

UNIT DATA		Compressor		Circuit wires		Max. fuse size		
		Version	Voltage	Btu/h	W	No.	Ømm ²	A
Size (W x D x H)	386 x 600 x 695 mm	EC L 56 AS	230/50/1	2730	800	3	1.5	10
Net weight	38 kg	EC L 56 AS	230/60/1	3071	900	3	1.5	10
SHIPPING DATA		EC M 56 AS	230/50/1	2730	800	3	1.5	10
		EC M 56 AS	230/60/1	3071	900	3	1.5	10
		EC S 56 AS	230/50/1	2730	800	3	1.5	10
		EC L 56 WS	230/50/1	2730	800	3	1.5	10
		EC M 56 WS	230/50/1	2730	800	3	1.5	10
		Carton (W x D x H)	460 x 670 x 810 mm					
Weight	45 kg							

Version	Condensation	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
			10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
EC L 56 AS	Air	230/50/1	31	30	23	33.1	7.6	4.2	400
EC L 56 AS	Air	230/60/1	35	34	27	32.3	8.6		470
EC M 56 AS	Air	230/50/1	32	31	24	33.0	7.9	3.8	400
EC M 56 AS	Air	230/60/1	35	34	27	32.3	8.6	20.2	470
EC S 56 AS	Air	230/50/1	25	24	19	38.6	7.1	3.1	400
EC L 56 WS	Water	230/50/1	31	30	23	33.1	7.6		400
EC M 56 WS	Water	230/50/1	33	31	27	26.0	7.0	20.2	400

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions