Modular Ice Machine 150 kg

Item #:
Project:
Quantity:



FEATURES

- Individual transparent solid cube: each single cube is an artwork: crystal clear and perfectly shaped, faithful to the Scotsman tradition.
- Global standard footprint: strictly follows international imperial standard commonly adopted in the industry of reference.
- Agion: the technology that makes products cleaner and longer lasting with built-in protection working 24/7 to resist the growth of microbes and the development of unpleasant odors.
- Electronic control: ambient and water temperatures may change throughout the years but your ice will stay the same.
- External indicator lights: keeps ice maker's operations under constant surveillance
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Clean alert: advises with a blink when it's time to clean the filter.



MXG L 328 Large Gourmet 39 g Ø 38 x H 41 mm



MXG M 328 Medium Gourmet 20 g Ø 30 x H 34 mm



MXG S 328 Small Gourmet 8 q Ø 21 x H 25 mm

CONDENSING
SYSTEM

Air cooled Water cooled

	RECOMMENDED BINS					
	Head	Bins	kg			
	MXG 328	V	SB193	129		
	IVIAG 328	~	SB322	168		

REFRIGERANT **GAS**

R404A R452A

VOLTAGE V/Hz/ph

230/50/1 230/60/1

LEGEND:

✓ : Perfect combination between ice maker and bin : Ice chute cut-out performed upon installation CBTxxxxxxxxx : need additional bin top

RTIFICATION







Minimum Maximum 10 43 Air temperature Water temperature 1 bar (14 psi) 5 bar (70 psi) Water pressure -10% +10% Electrical voltage

OPERATING REQUIREMENTS

ORTANT NOTICE:

els and specifications are subject ge without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals. Download our free App Scotsman Ice Apple store Google play Windows store

www.scotsman-ice.it www.scotsman-ice.com


MXG 328 EXTREME





Modular Ice Machine 150 kg

Item #: Project: Quantity:

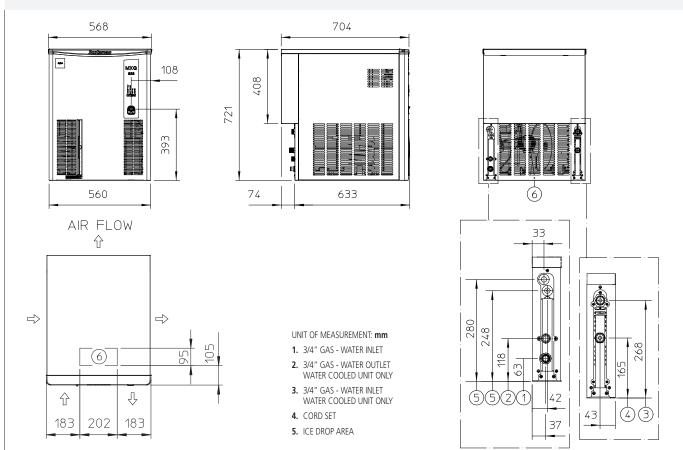

UNIT DATA SHIPPING DATA Size (W x D x H) 568 x 704 x 721 mm Carton (W x D x H) 630 x 770 x 910 mm Net weight 66 kg Weight 77 kg

		24 h ice production kg °C Amb. / °C Water		Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
	V. II	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	w	w	No. x Ømm²	А
Version	Voltage	kg	kg	kg							
MXGL 328 AS	230/50/1	140	137	110	20.5	22.5	10.8	1170	2650	3 x 1.5	16
MXGL 328 WS	230/50/1	135	133	114	17.2	19.6	79.2	950	2650	3 x 1.5	16
MXGM 328 AS	230/50/1	150	147	110	21.2	23.3	13.3	1200	2650	3 x 1.5	16
MXGM 328 WS	230/50/1	150	145	126	15.8	20.5	91.7	950	2650	3 x 1.5	16
MXGS 328 AS	230/50/1	140	137	105	22.0	23.2	14.5	1200	2650	3 x 1.5	16
MXGS 328 WS	230/50/1	140	134	115	19.1	22.0	160.4	970	2650	3 x 1.5	16
MXGL 328 AS	230/60/1	144	141	112	23.8	26.2	15.0	1350	3100	3 x 1.5	16
MXGM 328 AS	230/60/1	150	144	110	24.7	27.2	14.6	1360	3115	3 x 1.5	16
MXGM 328 WS	230/60/1	150	144	130	20.0	26.0	125.0	1200	3115	3 x 1.5	16
MXGS 328 AS	230/60/1	165	152	130	20.8	27.0	160.4	1200	3115	3 x 1.5	16
MXGS 328 WS	230/60/1	165	152	130	20.8	27.0	160.4	1200	3115	3 x 1.5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions